



冠力通机械
GUANLITONGJIXIE

山东冠力通 机械有限公司



服务质量第一 · 品牌信誉第一

A person wearing a bright yellow jacket and a helmet stands on a snowy mountain ridge, arms raised in a celebratory gesture. In the background, a massive, snow-covered mountain peak rises steeply under a clear blue sky with the sun shining brightly, creating a lens flare effect.

永不满足 · 争创一流
完善自我 · 不断发展

Never be Satisfied Strive for best Self-improvement Continuoua development



公司简介

Company profile

山东冠力通机械有限公司:座落在山东省会济南市区东30公里有小泉城之称的章丘,临近瓷都淄博。南北接壤309国道与青银高速,紧靠济南遥墙国际机场,地理位置优越,交通环境便利,文化底蕴敦厚,是国家能源设备的重要生产基地。

山东冠力通机械有限公司 是一家集研发,生产,销售为一体的生产厂家,专业生产大、中型系列烘干设备、颗粒机生产线设备以及生产线辅助设备等环保设备,真诚助各界朋友成就伟业!坚持“诚信服务,信誉保证”的创业思想,以“质量保证,用户至上”为服务宗旨。公司主要产品已申请国家多项发明专利,同时获得“企业信用评价AAA级信用企业”“重合同守信用企业”“诚信经营示范单位”等荣誉称号。销售网络覆盖全国,为海内外客户提供了周到的服务。广泛适用于农业、矿业、化工、冶金、建材、煤炭、林业等行业。

公司发展秉承高效,节能,环保安全之理念,以先进的技术、最优的方案、专业的施工队伍及完善的售后服务,饮誉国内外,深受广大用户的欢迎!

我们是一个充满朝气的企业,始终秉承“厚德载物”的企业宗旨,坚持以诚取信,以信立业,我们将永远对客户、员工社会履行一个企业应尽的全部义务。热情欢迎各界朋友的真诚合作,祝新老客户的事业蓬勃发展。业绩更辉煌。



10

国家专利：拥有国家发明专利10余项。

10

科研团队：拥有核心技术团队10余人。

40

员工人数：在职员工人数40余人。

450+

年均产量：450多台。

20000

占地面积：20000平方米

5000000

注册资金：5000000元

技术创新：

技术总工从事机械设备行业30余年，拥有核心技术团队，多项发明专利与著作权。

政府支持：

《高新技术企业》、《技术研发中心》、《冠力通党支部》、《冠力通工会》

资质认证：



SIEMENS

invtr

SIEMENS MOTOR



Schneider
Electric

MITSUBISHIELECTRIC



ABB

HAREBIN BEARING GROUP CORP

SVENSKA KULLAGER-FABRIKEN



INVT ELECTRIC CO., LTD

SCHNEIDER ELECTRIC SA

CHINT



AIRTAC

GUOMAP REDUCER GROUP

BONENG TRANSMISSION CO., LTD

CHINT

BONENG

ZHENGCHANG GROUP




客户的每一点需求我们都愿为之不懈努力

We are willing to make unremitting efforts for customer's every require



国内覆盖**30**个省市自治区

Covering 30 provinces and autonomous regins in China

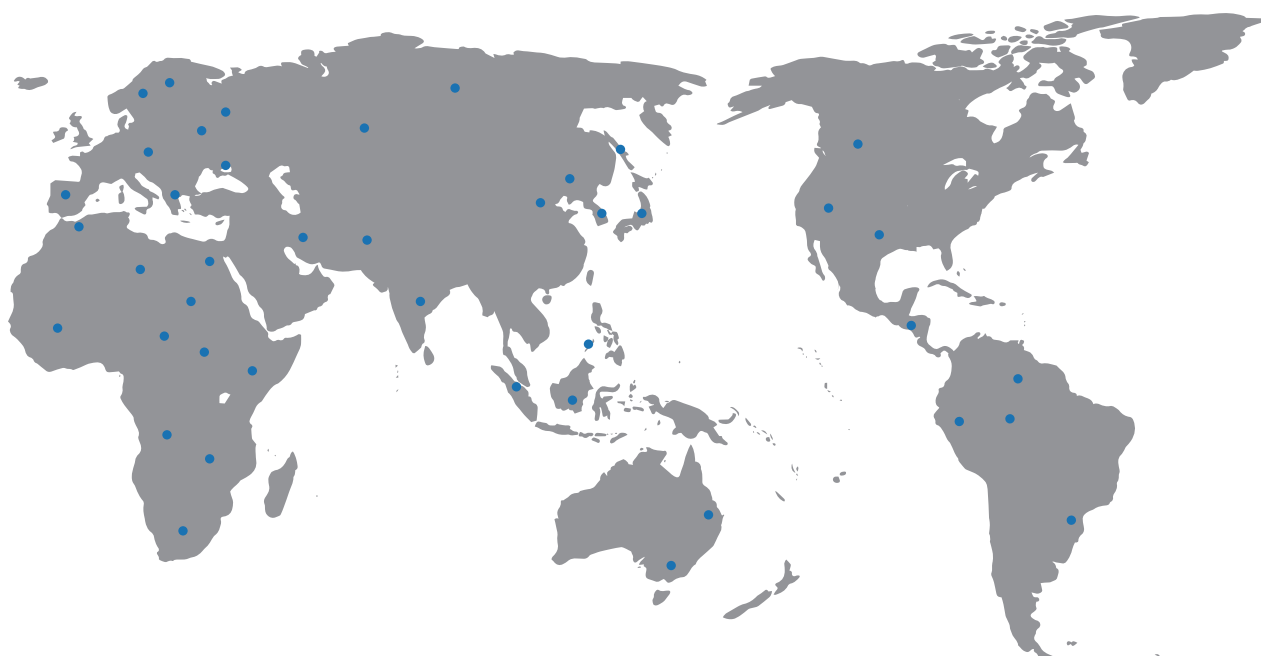

国际覆盖**100**个国家地区

Covering 100 Countries and regions abrda

Contents

目录

01

制粒设备系列

Pelleting equipment

02

粉碎设备系列

Grinding equipment

03

破碎设备系列

Crushing equipment

04

烘干设备系列

Drying equipment

05

冷却设备系列

Cooling equipment

06

包装设备系列

Packing equipment

新型离心立式环模颗粒机 Centrifugal vertical Ring Die Pellet Machine



新式离心环模颗粒机

介绍:

新式立式离心制粒机是目前国内最新型颗粒机。此结构颗粒机采用大模数硬齿面斜齿减速箱，主轴强化，动力输出强，设备使用稳定，故障率低，生产成本低，是生物质行业首选主机机型。

设备特点:

- 1、自动化程度强，运行稳定，无需专人照看。
- 2、出料面积增加，提高产能
- 3、压辊无锁母结构设计，油耗少，轴承寿命延长
- 4、重型减速箱传动，齿轮强度加强5-10倍，故障率低，稳定性强
- 5、循环齿轮油润滑，降低油耗成本，保护轴承。

New centrifugal ring die machine

Introduction: The new vertical centrifugal pellet machine is the latest pellet machine in China. The pellet machine adopts a large modulus hardened helical gearbox strengthened spindle, strong power output, equipment stable operation, low failure rate, low production cost. It is the preferred machine model in the biomass industry. Machine features

- 1.Strong automation, stable operation, no need special care
2. Increase discharging area, increase production capacity.
3. Roller without lock, less grease consumption, extended bearing life.
4. heavy-duty gearbox transmission, gear strength is enhanced 5-10 times, low failure rate, strong stability
5. Circulating gear oil lubrication, reduce grease consumption costs, protect bearings.

型号 Model	功率(KW) Power	颗粒规格 (MM) Diameter	产量 (T/H) Capacity	外形尺寸 (MM) Measurement	重量 (T) Weight
GLT560	90/110/132	6-12	1.5-2.0	2200*1300*1600	5.8
GLT700	160	6-12	2.0-2.5	2400*1400*1800	7.8
GLT850	220/250	6-12	3.0-4.0	3000*1500*2300	12

立式环模颗粒机 Vertical Ring Die Pellet Machine



产品简介:

立式环模颗粒机吸收了卧式环模和平模的优点，摒弃了卧式环模压力小，模具爆裂，平模产量小，故障率高的缺点进行研发的生物质燃料成型设备。针对于生物质市场上的桉木、松木、桦木、杨木、果木及农作物秸秆、竹屑进行有效的压制。

设备特点:

- 1、模具立向，垂直进料，不起拱，易于散热；
- 2、模具静止立式安装，机器易于固定，机器运转平稳；
- 3、压轮旋转，使物料产生离心力，四周分布均匀；
- 4、模具两层，上下两用，降本增效。
- 5、新型上拨料系统增加拨料齿圈使用寿命，方便更换模具及检修。

Brief Introduction:

The vertical ring die pellet machine absorbs the advantages of the horizontal ring die pellet machine and the fiat die pellet machine abandoned the horizontal ring die pellet machine low pressure, mold is easy to burst, flat die pellet machine low capacity. equipment failure high, then research and development the biomass fuel pellet machine Presses the eucalyptus, pine, birch, poplar, fruit and crop straws and bamboo sawdust into pellets. The Features of Pellet Machine: 1 The mold is vertical, vertical feeding material, no arching, easy to dissipate heat 2. Mold stationary vertical installation, the machine is easy to fix, operation smoothly. 3. Roller rotating, the centrifugal force generated causes the material to be evenly distributed around. 4. Double-layer die, two layers both can be used, to reduce costs and increase efficiency. 5. The new upper feeding system increases the service life of the feeding gear ring, making it convenient for mold replacement and maintenance.

型号 Model	功率(KW) Power	颗粒规格 (MM) Diameter	产量 (T/H) Capacity	外形尺寸 (MM) Measurement	重量 (T) Weight
GLT560	90/110/132	6-12	1.5-2.0	2200*1300*1600	5.8
GLT700	160	6-12	2.0-2.5	2400*1400*1800	7.8
GLT850	220/250	6-12	3.0-4.0	3000*1500*2300	12



产品简介：
 生物质压块机是将经过粉碎后的秸秆(5cm以内)或者锯末原材料，在水分控制在10-25%范围内的情况下，通过主轴转动带动辊旋转，产生离心力将物料从模具孔中挤压出3cm块状成品的一款机器。

- 产品特点：**
- 1、自动化程度高，用工少，操作简答，效率高
 - 2、采用双压辊结构使主轴受力均匀，机器运转平稳、降低功耗
 - 3、模具和压辊采用特种合金材质，耐磨、耐压、耐高温，连续工作不变形
 - 4、设备采用全自动注油方式，全时间定时供油，省心、省力、省时，大大提高了使用寿命。
 - 5、设备适用物料范围广:农作物秸、农作物果壳、锯末等农林废弃物均可压制。

Briquette machine Machine introduction
 The biomass briquete machine is a machine that press crushed straw(within 5cm) or the sawdust etc. raw material, moisture content 10-25%,squeeze piece out piece of finished productThe rotation of roler is driven by rotation of main shaft to generate centifugal force to take the material from the mold hole. Machine features:
 1,High automation, less labor, simple operation, high efficiency.
 2,Double roller structure to make the spindle uniform force, the machine runs smoothly, reduce power consumption
 3.The mold and roller are made of special alloy material, which is wear-resistant, pressure-resistant and high-temperature resistant, continuous work without formation.
 4.The equipment adopts automatic oil fling mode, which supplies oi at regular time, saves energy, saves effort, saves time, greatly improving service life.
 5, The machine suit to a wide range of materials: straw, husks, sawdust etc, agricultural and forestry waste all can be pressed.

型号 Model	传动方式 Transmission mode	功率(KW) Power	孔数Holes(pcs) Holes(pcs)	加工能力t/h	成型尺寸mm
9GLT-2000型	皮带传送	75	55	1.5-2.5	32×32
9GLT-3500型	减速机	110	72	2.5-3.5	32×32



产品简介:

高效粉碎机是让物料进入粉碎室，通过高速旋转的转子产生的冲击力、剪切力和物料间的相互撞击力把物料粉碎，经筛网筛选后达到指定规格的产品。

产品特点:

- 1、电机跟转子直连，转速达3000r/min，动力损耗低，效率高
- 2、双侧筛网出料，增加出料面积，提高产能。
- 3、机身独特结构设计，下料流畅，无死角。
- 4、筛网孔径可调，保证成品粒度需求旋风除尘、布袋除尘相结合除尘效果好。

High efficiency hammer mill working principle is that the raw material go into the grinding room then will be grinding by the impact force and shear force caused by high speed rotating rotor and collision force caused by the high speed rotating rotor, then pass through the screen to get the eligible products. Features:

1. The motor connect rotor directly, the rotating speed can be 3000r/min, lower power loss and higher efficiency.
2. Discharge from both sides, increased the discharge area and improved capacity.
3. The machine body adopts unique structural design, discharge smoothly with seamless,
4. The particle of screen can be adjusted, ensure finished products requirement.
5. Work with Cyclone and Bag Dust Collector, more better dedusting efficiency.

型号 (Model)	功率 (KW) (Power)	产量 (T/H) Capacity	锤片 (hammer)
GLT65×55	55	1-1.5	48
GLT65×75	75	1.5-2	72
GLT65×100	90	2-3	96
GLT80×100	110	3-4	110
GLT80×130	132	4-6	132
GLT1300×1500	220/250	8-10-12	224

双转子粉碎机 Double Rotor Hammer Mill



产品简介:

双转子粉碎机内含两个转子，两个转子相对旋转，增加锤片对物料的正面冲击的概率，增加利用一部分颗粒与颗粒之间的碰撞，粉碎无死角从而提高效率。广泛适用于中小型刨花板和纤维板生物质企业的备料工段，也可用于个体户进行木片粉碎工段。

产品特点:

- 1、设计合理，科学的利用了锤片式粉碎机的工作原理，侧面提高了粉碎机的打击物料的速度。
- 2、该设计改变了物料在粉碎室内的运动线路，充分利用粉碎室空间扩大了粉碎面积，并最大限度的保护了筛片，使筛片的使用寿命提高1倍以上
- 3、该机运转平稳，运转时，平稳度优于单转子粉碎机
- 4、运行稳定，产量大，用户大型粉碎线中使用

Double Rotor Hammer Mill

The double rotor hammer mill contains two rotors, and the two rotors rotate relative to each other, increasing the probability of the frontal impact of the hammer on the material, increasing the collision between apart of the particles and the other particles, and smashing without dead angles, thereby improving efficiency. it is widely used in the preparation section of small and medium-sized particleboard and fiberboard biomass enterprises, and can also be used for self-employed wood chips crushing sections. Double Rotor Hammer Mill Features

1. The design is reasonable, scientifically utilizes the working principle of the hammer mill, and improves the speed of the material of the crusher.
- 2- The design changes the movement line of the material in the pulverization chamber, fully utilizes the space of the pulverization chamber to enlarge the pulverization area, and protects the sieve piece to the utmost extent, so that the service life of the sieve piece is more than doubled.
- 3, The machine runs smoothly, when running, the smoothness is better than the single rotor high efficiency hammer mill.
- 4, Stable operation, large output, always used in large crushing lines.

型号 (Model)	功率 (KW) (Power)	产量 (T/H) Capacity	锤片 (hammer)	重量 (T) Weight
GLT65*75	55/75*2	4-5	144	4.3
GLT65*100	90/110*2	5-8	192	5.2
GLT75*100	110*132*2	6-10	192	8.2

鼓式木片机

Drum Wood Chipper



产品简介:

鼓式木片机是由机座、刀辊、上下喂料机构、送料装置和液压缓冲系统组成，主要用于圆木、小径木、枝丫、枝条、板皮、板条、毛竹等物料的破碎

- 产品特点:

1、结构稳定，产能高，加工成本低。

2、进料口尺寸大，方便物料进入，提高产能。

3、转子刀片数量可调，破碎后物料均匀。

4、物料适应范围广，不受水分限制。

Product introduction

The drum wood chipper is composed of a machine base, a knife roll. an upper and lower feeding mechanism, a feeding device and a hydraulic buffering system, and is mainly used for crushing materials such as logs, small-diameter wood, branches, branches, boards, slats, and bamboo.
Features:

1. Stable structure, high productivity and low processing cost

2. The size of the feed port is large, which facilitates the entry of materials and increases the production capacity.


3. The number of rotor blades is adjustable, the material is even after crushing.

4. The material adapts to a wide range, not subject to moisture restrictions.

型号 (Model)	功率 (KW) (Power)	产量 (T/H) Capacity	进料口尺寸cm	削片后尺寸mm
GLT216	55+3*2+1.5+1.5	3-8	20*50	30*30*5
GLT216-D	75+5.5*2+1.5+1.5	3-8	20*120	30*30*5
DLT218	110+5.5*2+1.5+1.5	8-15	30*68	30*30*5
GLT218-D	160+7.5*2+3+2.2	8-15	30*120	30*30*5
GLT2113	220+7.5*2+3+2.2	15-25	35*80	30*30*5

移动式木片机

Mobile Wood Chipper

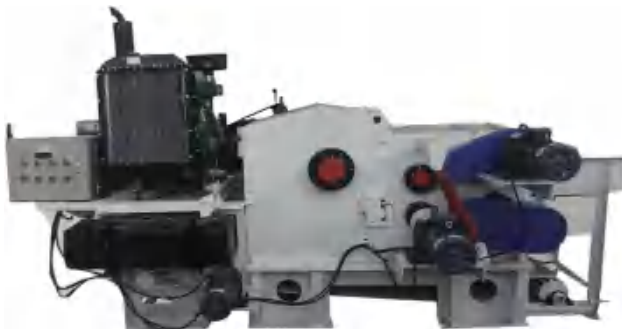

综合破碎机

Comprehensive Crusher



综合破碎机加工原料广泛，可加工木材，如各类小径木、板皮、板条、圆木芯、建筑模板等，以及各类非木质原料如各类散装秸秆、棉柴、芦苇等，适用范围广泛。本机采用链板式智能进料，可根据主电机负荷自动调节进料速度。使机器满负荷运转避免空载运行，使进料更加顺畅，大幅度提高生产能力，是生物质发电厂的理想首选设备。

The comprehensive crusher has a wide range of processing materials, which can process wood, such as all kinds of small diameter wood, veneer, Flat noodles, round wood core, building formwork, etc., and all kinds of non wood materials, such as all kinds of bulk straw, cotton firewood, reed, etc., with a wide range of applications. This machine adopts chain plate type intelligent feeding, and can automatically adjust the feeding speed according to the load of the main motor. Making the machine run at full load to avoid no-load operation, making the feeding more smooth, greatly improving production capacity, is the ideal preferred equipment for biomass power plants.

型号 (Model)	2000-1000	1600-600	1400-600	1250-600
刀辊直径Knte rollerdiameter(mm)	1400	800	800	800
虎爪数量 Number of tiger PAWS	42个	28个	24个	20个
刀片数量 Knife qty(piece)	2-4片	2-4片	2-4片	2-4片
刀辊转速 Knife roller speed(RPM)	920	800	800	540
木片长度 Lengthofwoodchips(mm)	90%≤100 85%≤50	20-30	25-35	25-35
主电机功率Main motor power(kw)	400	200	185	132-160
生产能力 Output capacity (t/h)	树皮80-120t/h 含水量55%模板 25-50t/h	20-30	18-25	15-20
外形尺寸 Dimensions size (mm)	14600×3800×3475	8600×2680×2800	8600×2480×2800	8300×2300×2900

滚筒筛

Rotary Screener



产品简介：

滚筒筛主要有电机、减速机、滚筒装置、机架、密封盖、进出料口组成。滚筒装置倾斜安装于机架上。电动机经减速机与滚筒装置通过联轴器连接在一起，驱动滚筒装置绕其轴线转动。当物料进入滚筒装置后，由于滚筒装置的倾斜与转动，使筛面上的物料翻转与滚动，使合格物料(筛下产品)经滚筒后端底部的出料口排出，不合格的物料(筛上产品)经滚筒尾部的排料口排出。由于物料在滚筒内的翻转、滚动，使卡在筛孔中的物料可被弹出，防止筛孔堵塞。

Rotary screener mainly makes up with motor, reducer, roller device, frame, sealing cover.inlet and outletThe roller device is tited on the frame. The motor is connected with rollerdevice through shaft coupling by the reducer, and drive roller device around its axis of ro.tation. When the materials fed in the roller device, due to tilt and rotation of roller devicethe material on the screen surface roll and rotate. Finally the qualified materials willbe discharged through the discharge port at the bottom of roller, the unqualified mate-rials will bedischarged through the discharge port at the end of the roller device.Due to the material-flip and scro, the material stuck in screener will be pop up, to prevent the mesh plug.

型号 (Model)	产量 (T/H) Capacity	尺寸mm	功率KW
GLT100*2	1-2	2800*1300*1460	1.5
GLT130*3	1.5-4	4420*1500*3800	3
GLT150*4	3-5	5160*1700*4400	4
GLT180*5	5-10	6300*2200*2600	4
GLT200*6	8-12	7000*2500*5000	5.5

滚筒烘干机

Rotary Dryer



产品简介：

滚筒烘干机主要由筒体、辊圈、底座挡辊、尾部除尘设备组成，通过热风 and 物料在筒体内接触，经过筒内扬料板结构设计，使物料和热风充分接触从而达到烘干效果的烘干设备

产品特点：

1、筒体内扬料板设计多角度，使物料在筒体内形成料幕
 2、物料和热风接触面高，热效率利用高，烘干效果好
 3、结构设计合理，利于维护
 物料适用范围广，可用户粉末、木片、丝状物料等的烘干

Product introduction:

The rotary dryer is mainly composed of a cylinder body, a roller ring, a base retaining roller and a tail dust removing device. The hot air and the material arecontacted in the cylinder body, and the material is designed to make the materialand the hot air fully contact to achieve the drying effect.Features:

1. The design of the lifting plate in the cylinder is Multi-angle,so that the materiaforms a curtain in the cylinder.
 2.The material and hot air contact surface is high,the thermal efficiency is high.and the drying effect is good.
 3.The structure design is reasonable, which is conducive to maintenance
 4.The material has a wide range of applications, can be used for the drying of powder, wood chips,sik materials, etc.

型号 (Model)	功率 (KW) (Power)	蒸发量 Eaporation	倾斜度 Gradient	厚度 Thickness
GLTΦ1.2*12*1	5.5+7.5+3	0.27-0.54t/h	3-5°	10-12mm
GLTΦ1.5*12*1	7.5+18.5+4	0.42-0.85t/h	3-5°	10-12mm
GLTΦ1.5*18*1	5.5+18.5+4	0.42-0.85t/h	3-5°	10-12mm
GLTΦ1.8*18*1	11+22+4	1t/h	3-5°	10-12mm
GLTΦ2.0*24*1	11+37+7.5	1.- -3.0th	3-5°	14-18mm
GLTΦ2.2*12*1	11+22+4	1.2t/h	3-5°	14-18mm
GLTΦ1.2*24*1	15+27+5.5	1.82-3.65t/h	3-5°	14-18mm
GLTΦ2.5*18*1	4*4+55+5.5	2.7-4.1t/h	3-5°	14-18mm
GLTΦ2.8*18*1	5.5*4+90+5.5	3.5-5.5t/h	3-5°	16-20mm



产品简介:

三筒烘干机是由三道筒体设计组成，物料经过三道筒体内回旋充分利用热能将物料烘干到指定的水分要求。

产品特点:

- 1、三道筒体设计，热效率利用率高，产能大。
- 2、三道筒体结构，占地面积少。
- 3、适用锯末、粉末料等大型烘干生产线。

Machine introduction:

The three-cylinder dryer is composed of three cylinders. The material is swirled through three cylinders to fully utilize the heat to dry the material to the specified moisture requirements.

Features:

1. Three-tube design, high thermal efficiency utilization and large production capacity;
2. Three-tube structure, save space
3. Suitable for large drying production lines such as sawdust and powder materials.

型号 (Model)	功率 (KW) (Power)	蒸发量 Eaporation	转速 Rotating speed
GLT1.8*10*3	3*2kw	0.8~1.4	4-10r/min
GLT2.0*10*3	3*2kw	1.2~1.8	4-10r/min
DLT2.2*10*3	4*2kw	1.6~2.2	4-10r/min
GLT2.5*10*3	4*2kw	2.0~2.6	4-10r/min
GLT2.8*10*3	5.5*2kw	2.4~3.0	4-10r/min

逆流式冷却机 Counter Flow Cooler



产品简介:

逆流式冷却器是目前国际上比较先进的一种新型冷却器，它是利用逆流冷却原理对高温、高湿度的颗粒料进行冷却。自然风垂直穿过料层，先与料层相接触，逐步变热的热风与热料相接触，风流方向与料流方向相反，使颗粒顺向逐步冷却，可避免因冷风与高温颗粒料直接接触，使颗粒骤冷而引起的颗粒表面开裂。空气从其底部全方位进入冷却器，进风面积大，利用率高，能耗低，操作简便，冷却效果显著。颗粒冷却充分、均匀，采用独特的滑阀震动是机械排料、运转平稳、排料流畅、冷却后的颗粒温度为室温这 $\pm 10-15^{\circ}\text{C}$ 。

Brief introduction

derirer ducoter is one of the most advanced new colerin international curently; it uses the principle of countercurrent, coling the high temperature and high humidity materials. the hiah tempera pass through the material ayer vertically. and touch the materials frst then the wird tara bot raduapelts The nae not pesse wan drection is opposite with the materal drection, make the pelets coled gradually. pll with te hatsks ue to its sudden colingby touching wit the cold wind. The air enters into the coler from its bottom fuly. wide entering area, high utization rate, ow eneraay consumotion. easioperation, the coolina effect is remarkable pancis cooled suncienty and evenly, using a unigue slide valve is a mechanical vibration nest-ing, smooth operation, nesting smooth, granular temperature afer cooling is for room tempera- ture $\pm 10-15^{\circ}\text{C}$.

型号 (Model)	产量 (T/H) Capacity	冷却容M ³	冷却时间Min	冷却后料温 $^{\circ}\text{C}$	配用总功率KW	吸风量m ³ /h
GLT1.2	0.8-1.2t/h	1.2	$\geq 10\text{min}$	室温 $\pm 10-15^{\circ}\text{C}$	0.18+4	5000m ³ /h
GLT1.5	1.2-2.0t/h	1.5	$\geq 10\text{min}$	室温 $\pm 10-15^{\circ}\text{C}$	0.25+5.5	9000m ³ /h
GLT5	2.0-4.0t/h	2.5	$\geq 10\text{min}$	室温 $\pm 10-15^{\circ}\text{C}$	0.25+15	13500m ³ /h
GLT4	4.0-6.0t/h	4	$\geq 10\text{min}$	室温 $\pm 10-15^{\circ}\text{C}$	0.37+22	18000m ³ /h
GLT6	5.0-8.0t/h	6	$\geq 10\text{min}$	室温 $\pm 10-15^{\circ}\text{C}$	0.37+37	27000m ³ /h



吨包秤 Ton Bag Packing Machine



广泛应用于精细化工、粮油、建材、橡塑等行业的颗粒状、片状、粉状物料的定量包装，吨包装半自动包装机适用于500~2000kg的定量计量包装。产品选型根据被包装物料的具体特性而灵活选用不同的产品型号，如重力式给料方式、螺旋给料方式等不同类型吨包装秤。包装控制精度为0.1级。根据物料的特性和用户现场的安装空间可以灵活选用不同类型的包装机。

Ton Bag Packing Machine

It is widely used to pack pellets, chips or powder from fine chemicals, food and oil industry, building material, rubber or plastics fields.

The weighing scope of semi-automatic packing machine is 500-2000 kg per bag with exact calculation.

According to material features and clients factory, we will recommend different machine types for you, such as gravity feed for packing machine, screw feed one

Technical Parameters: Precision: $\pm 0.1\%FS$

Weighing Scope: 500-2000 (kg/bag) (can be adjusted freely).

电脑定量包装秤 Computer Controlled Packaging Machine



电脑定量包装秤主要由自动称重装置、输送装置、缝包装置、电脑控制等四大部分组成。具有结构合理，造型美观，运行平稳，节能省电，操作方便，称重精确的特点。主机采用螺旋式下料，快、中、慢三速控制计量，先进的数字变频技术、采样处理技术、抗干扰技术，并实现误差自动补偿和修正。

广泛应用于各类颗粒物料的称重包装，利用物料本身的重量即可完成给料典型物料饲料，化肥，塑料粒子，种子，粮食，化工原料等。

Controlled Packaging Machine is mainly composed by automatic weighing device, conveyor, sewing equipment, computer control box etc.

It is advanced design and combines weighing and packing. It saves labor and improves wood pellet bagging efficiency.

What's more, it can largely improve the precision of pellet packing and at the same time will lower the damage to the pellets comparing with the labor work.

The packing machine adopts screw feeding with large, medium, small-three-speed control measure. It possesses top digital inverter and sampling technology, interference and achieves error automatic compensation and correction.

The packaging machine is widely used in kinds of materials package by the gravity themselves, such as feed pellet fertilizer, plastic seeds, food or chemicals.



旋风除尘器 Cyclone



电控柜 Electric Control Cabinet



风机 Fan Blower



自动除铁器 Automatic iron remover



布袋除尘 Bag dust removal




脉冲除尘 Pulse dust removal



皮带输送机 Belt Conveyor



大倾角皮带机 Highinclination belt conveyor

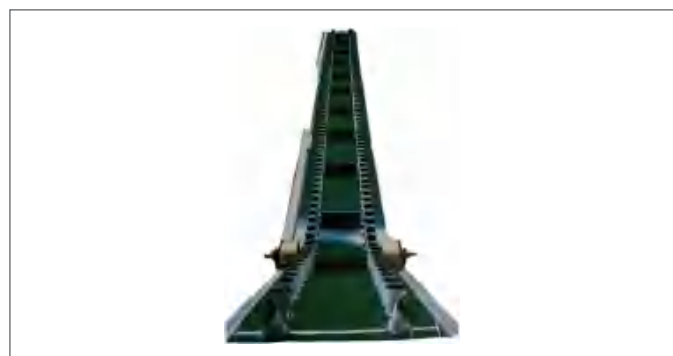

模具 Die



刀片 Blade



锤片 Hammer



筛网 Screen



偏心轴 Eccentric Shaft



压辊 Roller





压辊皮 Roller Wrap







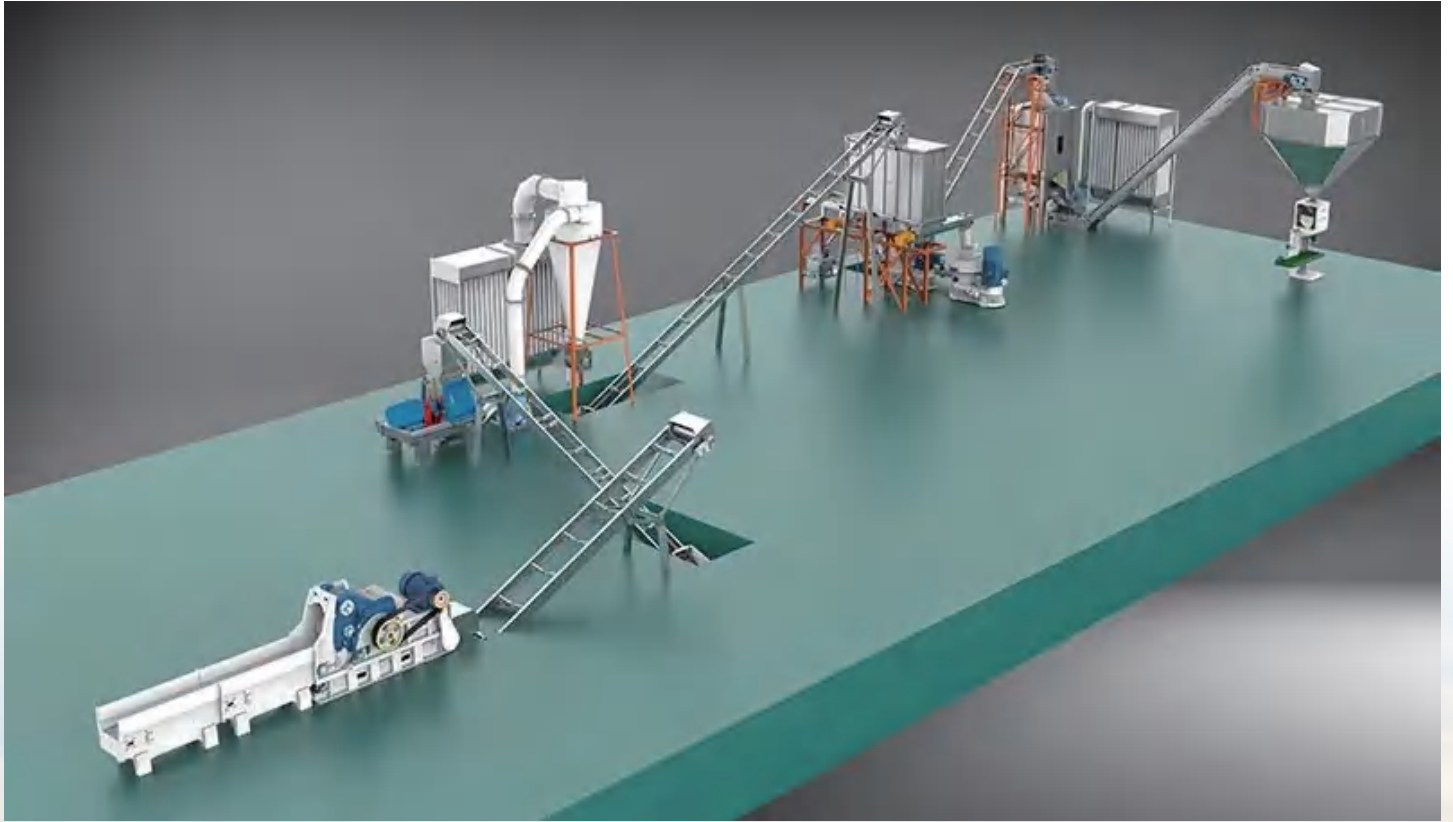

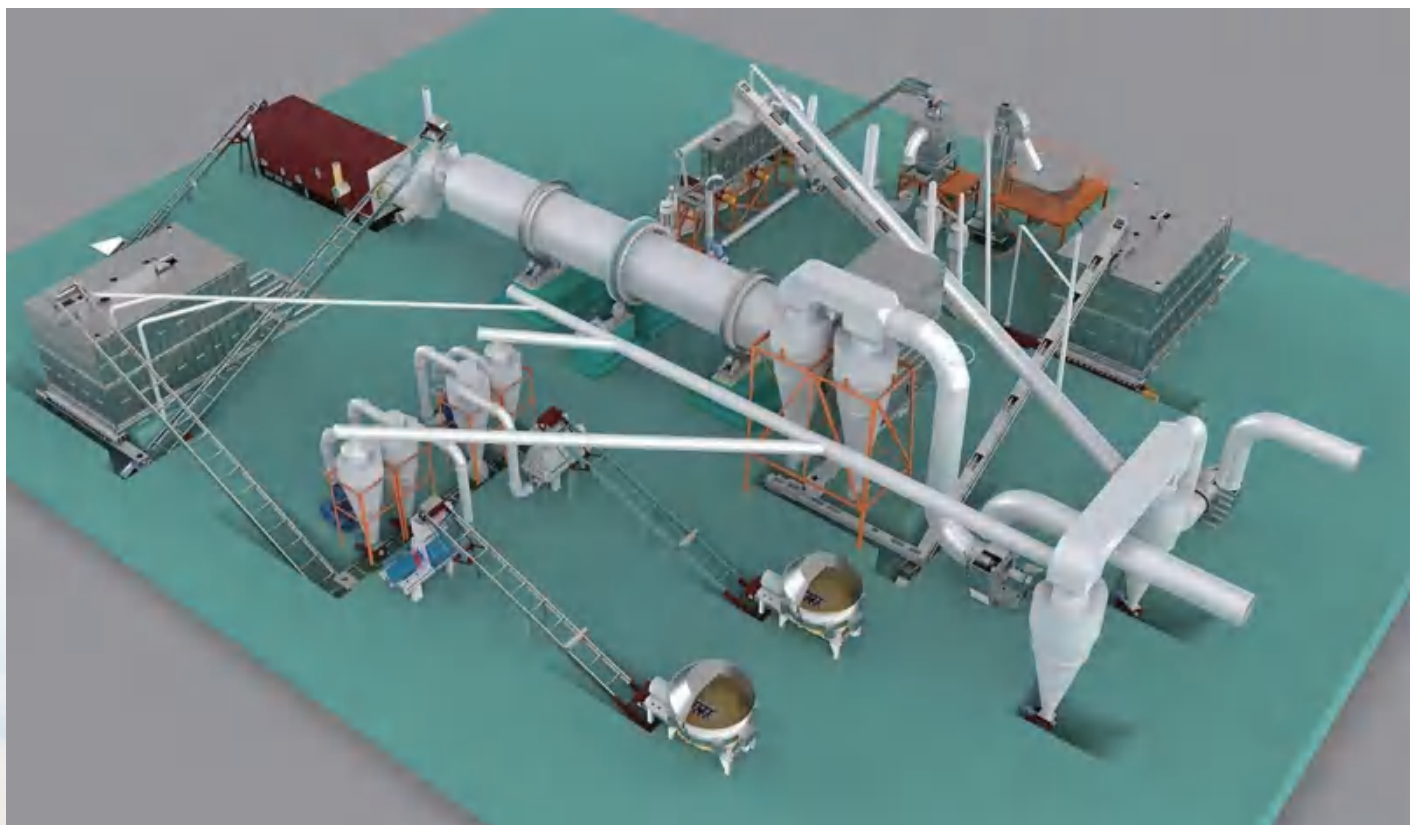



服务支持及售后服务

- 1、指导客户选择适合的设备型号
- 2、根据客户的特殊要求，设计制造产品，为客户解决相关技术上的问题。
- 3、全套设备质保一年(易损件除外)

山东冠力通机械有限公司

地址：山东省济南市章丘区绣惠街道金盘村桥北工业园园西01号

电话：15564106689 15564106192

网址：<https://guanlitong1.cn.china.cn>